




NEW PISTON NOZZLE

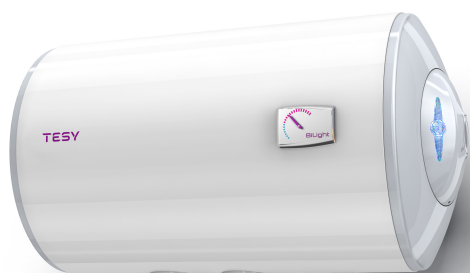


* For TESI BiLight 80 horizontal models with NEW PISTON nozzle, compared to TESI BiLight 80 horizontal models with previous PISTON nozzle.

**Up to 16%*
more hot water.**

BILIGHT HORIZONTAL

GCH 80 44 20 B12 TSR

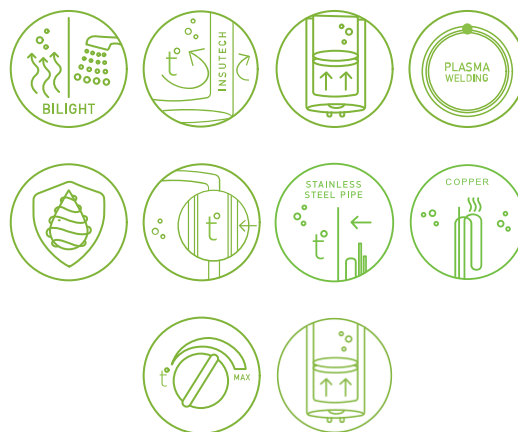

Model	BiLight 80 H
Real Volume	82 L
Rated power	2000 W
Heating time Δt 45K (15 - 60°C)**80°C	2:08 h:min
Annual consumption of electricity AEC	1431 kWh
Energy class	C
Height	0.855 m
Width	0.440 m
Depth	0.467 m
Diameter	440 mm
Mounting	Horizontal
Load profile	M
V40	111 L
T _{out} of the box	60 °C
MAX40	146 L

